


AD 220

Doosan
Mecc Alte
D+ &



ISO8528

GC,) &

SZUTEST

GC - \$\$\$%



2000/14/EC

&\$\$\$#(#

z) \$ z' z' D:

	"	"	"	"	Amp
400/230	220,00	176,00	200,00	160,00	288,00

fPQDE

GC,) &

,) & z

fDF DE

%\$1

% %&

GC" \$(**

z&(

GC

Standard Specifications

z

fl

!

E

z

z

ALTERNATOR

D: A Z'5JF

TRANSFER SWITCH

AD 220

Doosan
Mecc Alte
D+' &'

Manufacturer	Doosan		
Model	P086TI		
		% \$\$\$ "# "	
		% - \$\$\$ "	
		Q* + \$\$\$ < DQ	
	L	8,070	
	"	111X139	
		16,4:1	
	fl # ı	"# "	1500
	fl ı	L	15,50
		L	48,50
AbsorbedAirDischargeReSourceKey.Text	' # "	12,10	
	' # "	250,00	
	' # "	34,00	
	° C	580,00	
		24 V d.c.	
	Load	% \$ı	'+)ı
	# ") \$ı	
		43,10	31,70 21,10


		Mecc Alte
		ECO 38 2SN/4
	Hz	50
	"	200,00
7cg'		0,80
		3
	fl ı	400/230
	A	288,00
Temperature		H

		fl ı		fl ı	
	"	"	"	"	L
AD 220	1800,00	2688,00	1150,00	1624,00	380,00
		fl ı		fl ı	
	"	"	"	"	L
AK 50	2175	3400	1217	1938	380

AD 220

Doosan
Mecc Alte
D+ &

1 D+ &

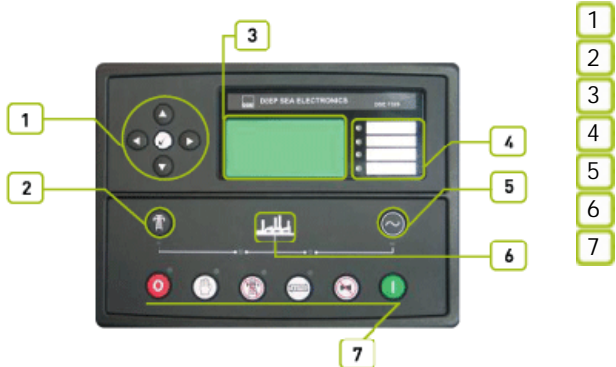

2

8G9ž + &\$ž) 5ž&&\$#(\$

3

„“
““
““
““

4

! „“
““

5

8G9+ ' &\$ ž
&&\$ ž
„ 8G9+ ' &\$ ž
8G9+ ' &\$ ž
ž

% &1 * („“
žFG& žFG(,) ž
ž

AD 220

Doosan
Mecc Alte
D+ &

f@#@Bt
f@#@Bt

"z" "z" "z"

f@#@Bt

971

#

#

#

#

#

6G'9B'*\$-\$)'\$

6G'9B'*\$\$\$!*!&

6G'9B'*\$\$\$!*!(

f&%) +t

f&)(, t

f&% \$t

GA 8

!&+""

%, !&*(

&(\$)


ž

ž

ž

AD 220

Doosan
Mecc Alte
D+ &''

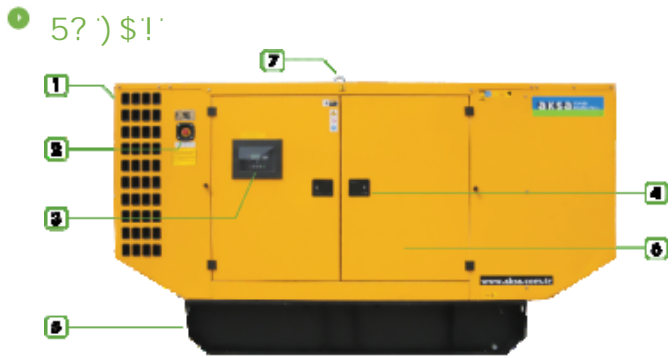

- 1 Steel structures
- 2 Emergency stop push button
- 3 Control panel is right side of the set.
- 4 Corrosion-resistant locks and hinges
- 5 Sump drains valves
- 6 Sound proof foam material
- 7 Lifting Points

	"	1217
fl "L	"	3400
fl "L	"	1938
	L	380

ОФИЦИАЛЬНЫЙ ДИЛЕР В УКРАИНЕ:

storgom.ua

ГРАФИК РАБОТЫ:

Пн. – Пт.: с 8:30 по 18:30

Сб.: с 09:00 по 16:00

Вс.: с 10:00 по 16:00

КОНТАКТЫ:

+38 (044) 360-46-77

+38 (066) 77-395-77

+38 (097) 77-236-77

+38 (093) 360-46-77

Детальное описание товара: <https://storgom.ua/product/dizelnyi-generator-aksa-ad2-0.html>

Другие товары: <https://storgom.ua/dizelnye-generatory.html>